


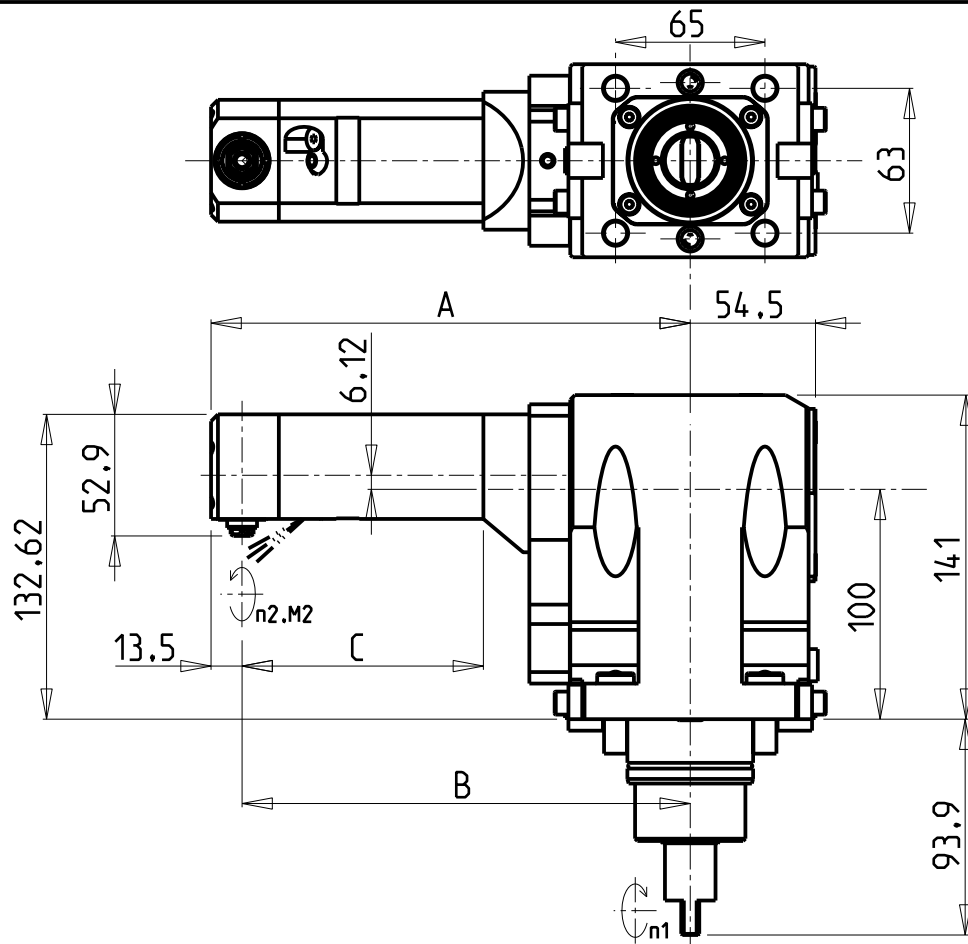


PER LAVORAZIONI INTERNE
SU FORI Ø60 MINIMO

For machining internal
holes with Ø60 min. hole

Fuer interne Bearbeitungen
am loch minimum Ø60

ATTENZIONE - ATTENTION - ACHTUNG

- Per lo smontaggio degli utensili utilizzare sempre la chiave di contrasto come indicato nel manuale d'uso.
- For disassembly of the tools use always the contrast key as mentioned in the user instructions.
- Fuer das Abmontieren der Werkzeuge immer den Gegenschlüssel benutzen wie in der Bedienungsanleitung erwäehnt.

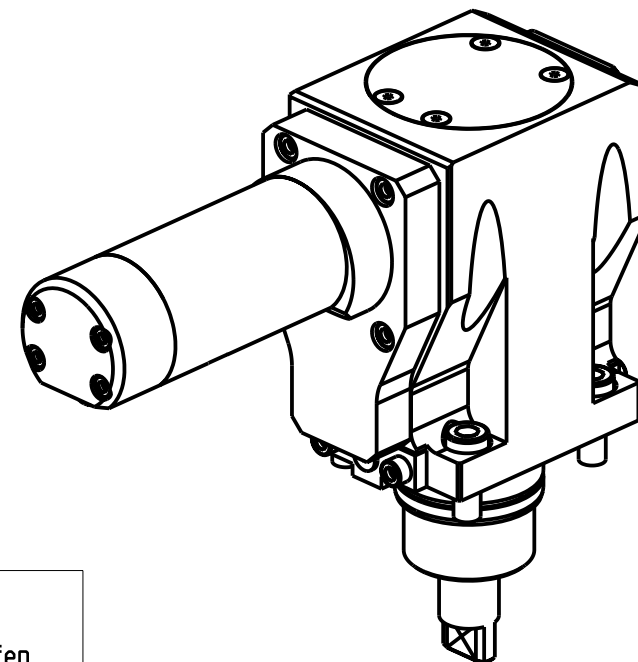

Cod. MT	Mandrino Spindle Spindel	I (n1:n2)	RPM max n2	Coppia Max Max Torque Max Drehmoment M2 (Nm)	Lubrificazione est. Ext. coolant Aussenkuehlung	A	B	C	CHIAVI INCLUSE Keys included Schlüssel einbegriffen	
BGL0501055	CHG	1:1	6000	8	X	158.5	145	55	CHUB13_SP3	CHCHG10
BGL0501105	CHG	1:1	6000	8	X	208.5	195	105	CHUB13_SP3	CHCHG10
BGL0501155	CHG	1:1	6000	8	X	258.5	245	155	CHUB13_SP3	CHCHG10

BIGLIA

MOD: B445/470/545/550/565/650/658/1200/446/465/745/765 - B750/1250 16 ST.

MODULO MOTORIZZATO RADIALE ROVESCiato DISASSATO IN Z

Radial inverted driven tool re-directed in Z

Radial angetriebenes Werkzeug umgedreht achsversetzt in Z

Subject to change without notice.

M.T. srl

Via Casino Albini 480
Tel. 0541/956034-957884
Fax 0541/956341

47842 S. GIOVANNI IN M. (RN)
e-mail: mtma@mtmarchetti.com
http://www.mtmarchetti.com



BGL120-1-30

03/2025