



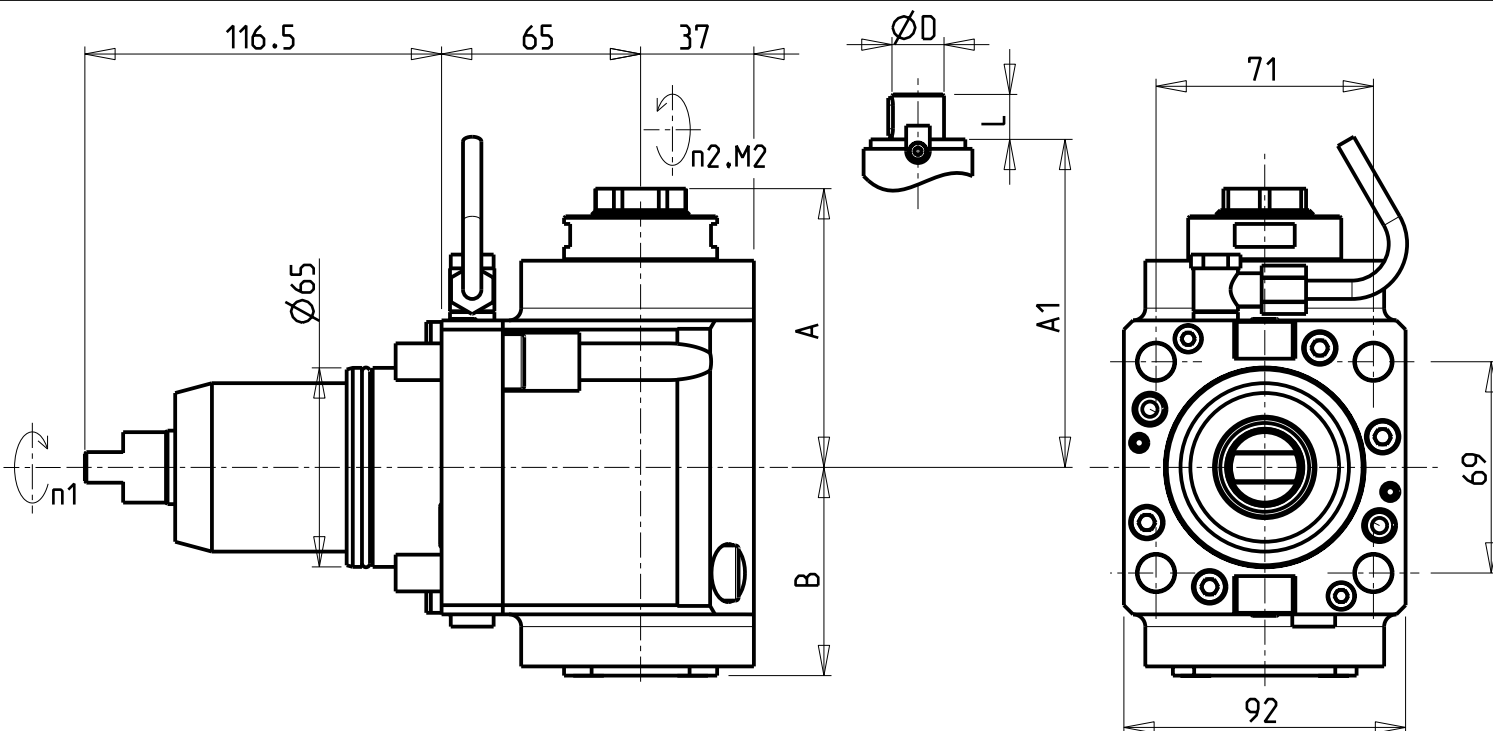

ATTENZIONE - ATTENTION - ACHTUNG

- Per lo smontaggio degli utensili utilizzare sempre la chiave di contrasto come indicato nel manuale d'uso.
- For disassembly of the tools use always the contrast key as mentioned in the user instructions.
- Fuer das Abmontieren der Werkzeuge immer den Gegenschlüssel benutzen wie in der Bedienungsanleitung erwaeht.

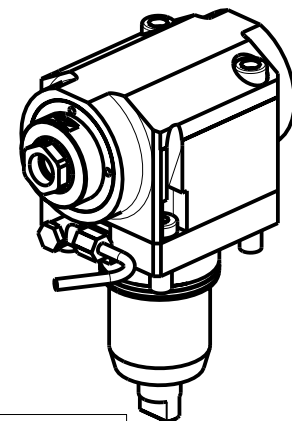

- Chiave inclusa
- Key included
- Schlüssel inbegriffen

Cod. MT	Mandrino Spindel Spindel	I (n1:n2)	RPM max n2	Coppia Max Max Torque Max Drehmoment M2 (Nm)	Reversibile lato mandrino/contromandrino Reversible sub/main spindle side Umkehrbare Spindel-seite/ Gegenspindel-seite	Lubrificazione int. Coolant through Innenkuehlung Pmax (bar)	Lubr. esterna Ext. coolant Aussenkuehlung	A	A1	B	D	L	CHIAVI NON INCLUDE Keys not included Schlüssel nicht einbegriffen	
NKM0260125	ERA25	1:1	6000	70	X	-	X	91.03	-	68	-	-	CHUB46	CHUB27
NKM0260132	ERA32	1:1	6000	70	X	-	X	94.53	-	68	-	-	CHUB46	CHUB32
NKM0260140	ER40	1:1	6000	70	X	-	X	108.16	-	68	-	-	CHUB46	CHSTER40
NKM0260225	ERA25	1:1	6000	70	X	70	X	91.03	-	79	-	-	CHUB46	CHUB27
NKM0260232	ERA32	1:1	6000	70	X	70	X	94.53	-	79	-	-	CHUB46	CHUB32
NKM0260240	ER40	1:1	6000	70	X	70	X	108.16	-	79	-	-	CHUB46	CHSTER40
NKM0262219	Ø22x19	1:1	6000	70	X	-	X	-	80	68	22	19	CHUB46	CH_VTCROCE_M10 •

NAKAMURA-TOME
WT300 - SC300 - SC300II 12ST. - TMC200/300M - SUPER NTX - SUPER NTXL - TW20M/MY/MM/MMY/MMYY 12ST.
TW30M/MY/MM/MMY/MMYY 16ST.
MODULO MOTORIZZATO ASSIALE H=65mm
Axial driven tool H=65mm
Axial angetriebenes Werkzeug H=65mm

M.T. srl
Via Casino Albini 480
Tel. 0541/956034-957884
Fax 0541/956341
47842 S. GIOVANNI IN M. (RN)
e-mail: mtma@mtmarchetti.com
http://www.mtmarchetti.com

MT

NKM150-3-10